




ARD

MRL HF Model

Designed to back up power for the existing VVVF-controlled lift system for bringing the lift to the nearest floor and opening the lift door in the event of mains power failure.

Features:

- Enhance passenger safety
- Powered by sealed lead acid battery
- Reliable microprocessor control
- Sine wave technology
- Mostly used in commercial projects
- Light weight and compact
- Simple, time saving for installation and maintenance

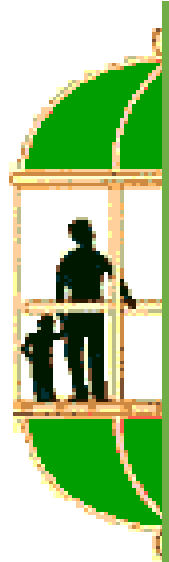

ARD2248 MRL series can supply back up power to any kind of existing VVVF-controlled lift system with simple installation; it is powered by sealed lead acid maintenance free batteries.

Technical Specifications

Model	2248F2-24-2L	2248F2-24-3L
Nominal Battery / Input Voltage	DC 24V	DC 24V
Nominal Battery Current	DC 5 - 20A	DC 5 - 40A
Battery Capacity	7AH	12AH
Output	2 phases	2 phases
Output Power	< 1000VA 400Vac±5% 50Hz±1% Sinusoidal Waveform 11KW and below	< 1500VA
Output Voltage		400Vac±5%
Output Frequency		50Hz±1%
Output Voltage Waveform		Sinusoidal Waveform
Output Motor Power		18.5 KW and below
Recommended Motor Speed	<5Hz	<5Hz
Battery Charger		
Input Voltage	400Vac±5% (50Hz±1%)	
Charging Current	1.5A	
Boost Voltage	28.8V max	
Nominal Floating Voltage	27.5V	
Temperature Compensation	No	
Safety Alarm		
Battery Voltage Low	DC18.5V	
Over-Heat of Inverter	Fan cooled	
Over-load	>120% Rated Output Power 3 seconds	
Time Delay for Detecting Mains Power Failure	0 - 66 Seconds	
Self-test and Take-over Time	10 Seconds	
Starting Time for Output Power Limit	2 Seconds	
Emergency Mode Time-out	3.0 Mins	
Dimension (L x W x H) mm	269 x 151 x 469	269 x 162 x 469
Weight (kg)	Approx. 12.5 w/o battery	Approx. 15 w/o battery

DAIREN

Components & Equipment Pte Ltd

Block 3027A Ubi Road 3 #01-93, Singapore 408656

Tel No: (65) 68485980

e mail : alfred_tankk@singnet.com.sg

web site : www.dce.com.sg